


**6-Prong  
Straight Barrel**

**Tee Nuts**

**Nuts**

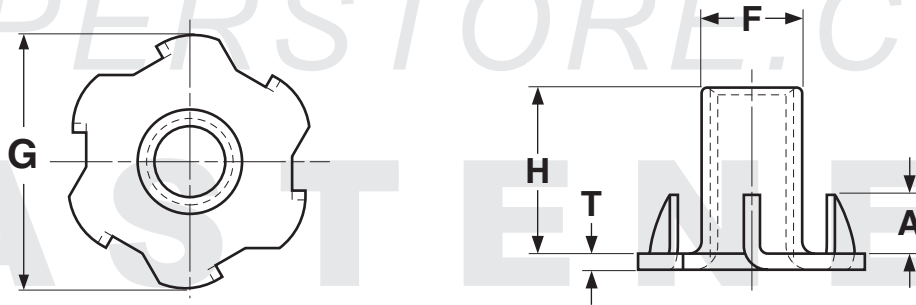

**6-PRONG**

**6-PRONG T-NUTS, STRAIGHT BARREL**

Part Number**	Thread Size	H	G	F	A	T	Drill Size	Part Number**	Thread Size	H	G	F	A	T	Drill Size
		Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)				Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)	
1404NT6	1/4-20	1/4	3/4	.305	3/16	.047	5/16	1407NT6	1/4-20	7/16	3/4	.305	7/32	.047	5/16
1405NT6	1/4-20	5/16	3/4	5/16	7/32	.047	5/16	1409NT6	1/4-20	9/16	3/4	.305	7/32	.047	5/16

\*\*Last digit of part number denotes number of prongs.

<b>Description</b>	Internally threaded barrel-shaped fasteners integrally formed with a flat base, which has prong-type projections extending perpendicular from the base aside the barrel.
<b>Applications/ Advantages</b>	Used for fastening metal to products made of wood, particle board or plastic. The 6-prong style is mainly used in softer plastics and relatively soft woods such as plywood and particleboard.
<b>Material</b>	C1004-10 low-carbon steel.
<b>Plating</b>	See Appendix-A for plating information.

NOTE: There is no single standard for T-nut dimensions. These values are offered as a guide; deviations from these specifications may occur.