


RS6 Miniature Sized, High Capacitance



FPCAP

- Low ESR, High Capacitance, High ripple current.
- Miniature Sized.
- Load life of 2000 hours at 105°C.
- Radial lead type : Lead free flow soldering condition correspondence.
- Compliant to the RoHS directive (2011/65/EU).

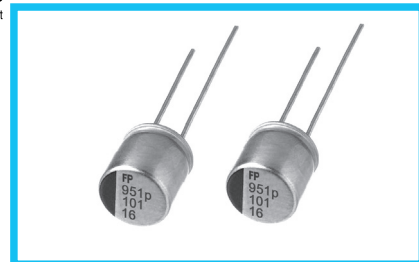



Specifications

Item	Performance Characteristics	
Category Temperature Range	-55 to +125°C	
Rated Voltage Range	2.5 to 25V	
Rated Capacitance Range	33 to 560μF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Tangent of loss angle (tan δ)	Less than or equal to the specified value at 120Hz, 20°C	
ESR (※1)	Less than or equal to the specified value at 100kHz, 20°C	
Leakage Current (※2)	Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C	
Endurance	Test condition	105°C, rated voltage 2000Hrs.
	Capacitance change	Within ±20% of initial value before test
	tan δ	150% or less than the initial specified value
	ESR(※1)	150% or less than the initial specified value
	Leakage current (※2)	Less than or equal to the initial specified value

※1 ESR should be measured at both of the terminal ends closest to the capacitor body.

※2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

Dimensions

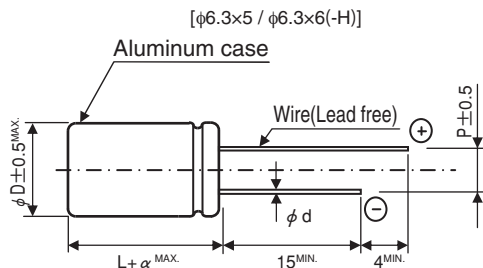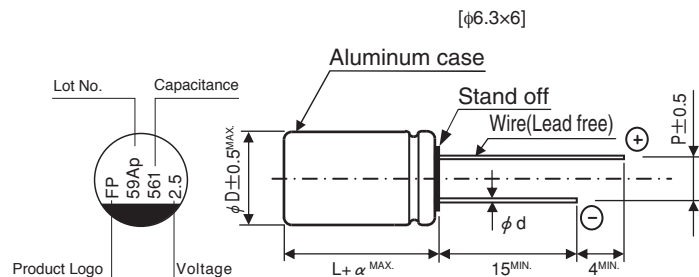


φD×L	φd	P	α
6.3×5	0.5	2.5	1.0
6.3×6	0.45	2.5	1.0

Frequency coefficient of rated ripple current


Frequency	120 Hz	1 kHz	10 kHz	100 kHz	300 kHz
Coefficient	0.10	0.45	0.50	1.00	1.00

Type numbering system (Example : 2.5V 560μF)

Nichicon part number

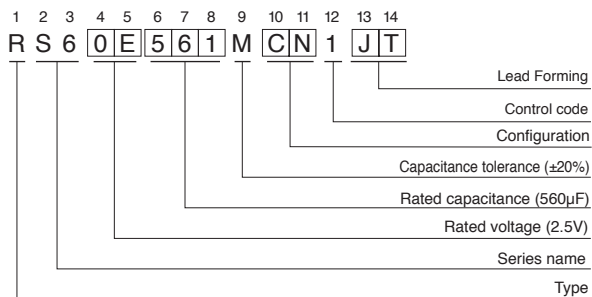

FPCAP part number


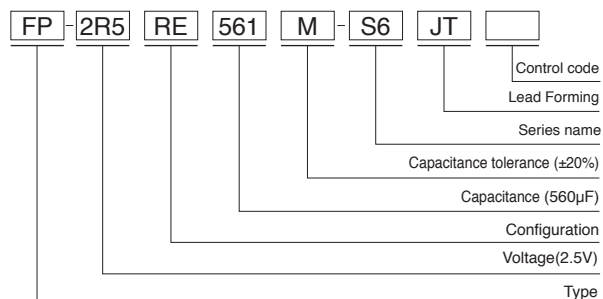


RS6

■ Standard Ratings

Rated Voltage (V) (code)	Surge Voltage (V)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA, 2min.)	ESR (mΩ, 100kHz)	Rated Ripple Current (mA _{rms})	NICHICON	FPCAP
2.5 (0E)	2.8	390	6.3×5	0.10	500	12	3500	RS60E391MCN1□□	FP-2R5RE391M-S6□□
		560	6.3×5	0.12	700	13	3600	RS60E561MCN1□□	FP-2R5RE561M-S6□□
10 (1A)	11.5	150	6.3×5	0.10	450	25	2500	RS61A151MCN1□□	FP-010RE151M-S6□□
16 (1C)	18.4	100	6.3×6	0.10	500	24	2490	RS61C101MDS1□□	FP-016RE101M-S6□□
		100	6.3×6	0.10	500	24	2490	RS61C101MCS1□□	FP-016RE101M-S6□□-H
25 (1E)	28.7	33	6.3×5	0.10	165	60	1700	RS61E330MCN1□□	FP-025RE330M-S6□□
		56	6.3×5	0.10	280	30	2800	RS61E560MCN1□□	FP-025RE560M-S6□□

■ Frequency Characteristics (The frequency characteristics are typical and not a guaranteed value.)

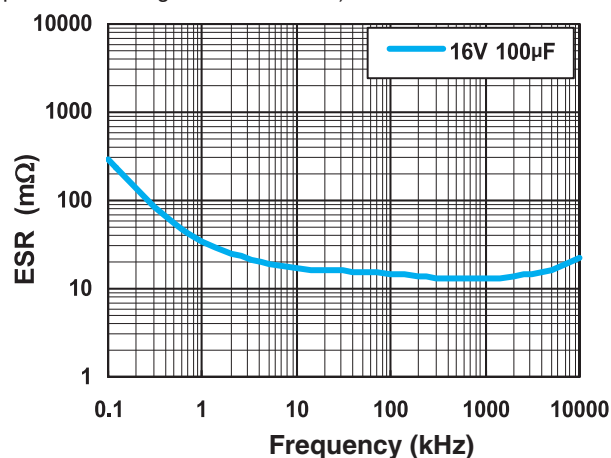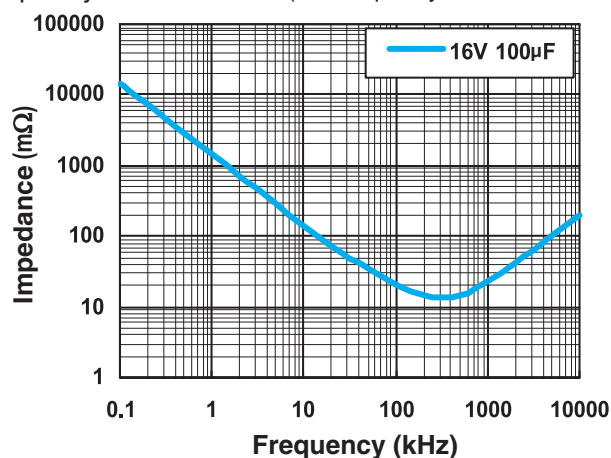

- Taping specifications are given in page 26, 27.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[RS61C101MDS1JT](#) [RS60E561MCN1JT](#) [RS61A151MCN1JT](#) [RS61E330MCN1JT](#) [RS60E391MCN1JT](#)
[RS60E391MCN1PX](#) [RS61E560MCN1JT](#) [RS61E560MCN1PX](#) [RS61C101MCS1](#)