

ALUMINUM ELECTROLYTIC CAPACITORS



UMA

5mmL, Standard, For General Purposes



- Standard series with 5mm height.
- Compliant to the RoHS directive (2011/65/EU).


Values marked with an ※ in the dimension table are scheduled to be discontinued and are not recommended for new designs.

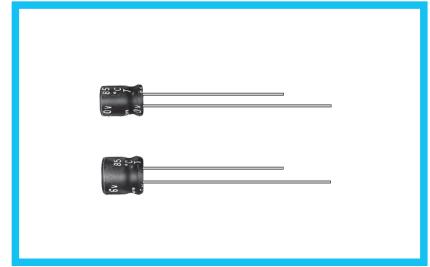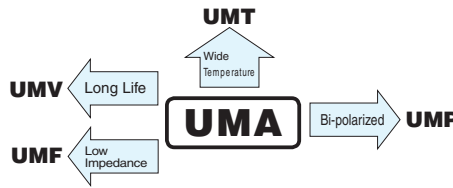

Specifications


Item	Performance Characteristics																										
Category Temperature Range	-40 to +85°C																										
Rated Voltage Range	4 to 50V																										
Rated Capacitance Range	0.1 to 470μF																										
Rated Capacitance Tolerance	±20% at 120Hz, 20°C																										
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3(μA), whichever is greater.																										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C																										
	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td rowspan="2">Figures in () are for UMR.</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.35</td> <td>0.24 (0.30)</td> <td>0.20 (0.24)</td> <td>0.16 (0.20)</td> <td>0.14 (0.18)</td> <td>0.12 (0.16)</td> <td>0.10 (0.13)</td> </tr> </table>	Rated voltage (V)	4	6.3	10	16	25	35	50	Figures in () are for UMR.	tan δ (MAX.)	0.35	0.24 (0.30)	0.20 (0.24)	0.16 (0.20)	0.14 (0.18)	0.12 (0.16)	0.10 (0.13)									
Rated voltage (V)	4	6.3	10	16	25	35	50	Figures in () are for UMR.																			
tan δ (MAX.)	0.35	0.24 (0.30)	0.20 (0.24)	0.16 (0.20)	0.14 (0.18)	0.12 (0.16)	0.10 (0.13)																				
Stability at Low Temperature	Measurement frequency : 120Hz																										
	<table border="1"> <tr> <td colspan="2">Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Impedance ratio</td> <td>Z-25°C / Z+20°C</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.)</td> <td>Z-40°C / Z+20°C</td> <td>15</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)		4	6.3	10	16	25	35	50	Impedance ratio	Z-25°C / Z+20°C	7	4	3	2	2	2	2	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	15	8	6	4	4	3
Rated voltage (V)		4	6.3	10	16	25	35	50																			
Impedance ratio	Z-25°C / Z+20°C	7	4	3	2	2	2	2																			
ZT / Z20 (MAX.)	Z-40°C / Z+20°C	15	8	6	4	4	3	3																			
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value (UMR & φ 3 product : Within ±25%)</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within ±20% of the initial capacitance value (UMR & φ 3 product : Within ±25%)	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																				
Capacitance change	Within ±20% of the initial capacitance value (UMR & φ 3 product : Within ±25%)																										
tan δ	200% or less than the initial specified value																										
Leakage current	Less than or equal to the initial specified value																										
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																										
Marking	Printed with white color letter on black sleeve.																										

Radial Lead Type

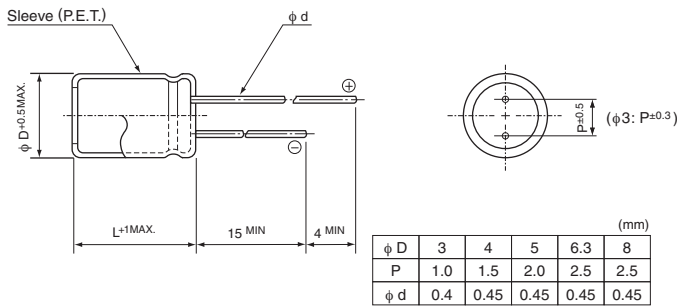

• Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 25V 10μF)

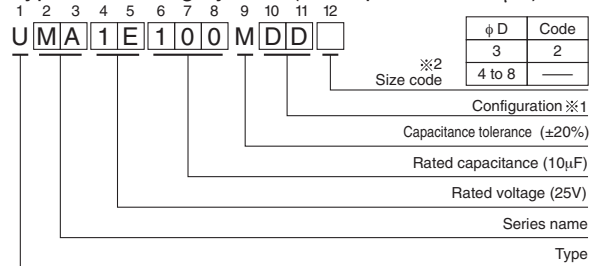

※ 1 Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
3	CD
4 to 8	DD

※ 2 In case at φ 3 units, put [2] as size code.

Dimensions

Cap. (μF)	Code	4		6.3		10		16		25		35		50	
		0G		0J		1A		1C		1E		1V		1H	
0.1	0R1													※ 4×5(3×5)	1.0(1.0)
0.22	R22													※ 4×5(3×5)	2.0(2.0)
0.33	R33													※ 4×5(3×5)	2.8(2.8)
0.47	R47													※ 4×5(3×5)	4.0(4.0)
1	010													4×5(3×5)	8.4(8.0)
2.2	2R2											3×5	8.4	• 4×5	13(10)
3.3	3R3									3×5	10	• 4×5	15(10)	4×5	17
4.7	4R7									• 4×5	16(12)	4×5	18	5×5	20
10	100			3×5	15			• 4×5	23(18)	5×5	27	5×5	29	6.3×5	33
22	220	3×5	19	• 4×5	28(21)	5×5	33	5×5	37	6.3×5	42	6.3×5	46	□ 8×5	52(48)
33	330	4×5	28	5×5	37	5×5	41	○ 6.3×5	49(43)	6.3×5	52	□ 8×5	62(52)	8×5	71
47	470	4×5	33	5×5	45	○ 6.3×5	52(43)	6.3×5	58	□ 8×5	70(62)	8×5	80		
100	101	5×5	56	○ 6.3×5	70(68)	□ 8×5	80(76)	□ 8×5	92(86)	8×5	110				
220	221	6.3×5	96	□ 8×5	110(90)	8×5	135								
330	331	8×5	145	8×5	170										
470	471	8×5	185											Case size φ D×L (mm)	Rated ripple

Size φ 3 × 5 is available for capacitors marked. "•"/ Size φ 5 × 5 is available for capacitors marked. "○"
Size φ 6.3 × 5 is available for capacitors marked. "□" In such a case, [M][R] will be put at 2nd and 3rd digit of type numbering system.

Rated ripple current (mArms) at 85°C 120Hz
() = φ 3 units and UMR.

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UMA0G101MDD](#) [UMA0G220MCD2](#) [UMA0J100MCD2](#) [UMA0J101MDD](#) [UMA1A221MDD](#) [UMA1A221MDD1TP](#)
[UMA1A330MDD](#) [UMA1C4R7MCD2TP](#) [UMA1E100MDD](#) [UMA1E101MDD](#) [UMA1H0R1MDD](#) [UMA1H100MDD](#)
[UMA1H100MDD1TP](#) [UMA0G331MDD](#) [UMA0G470MDD](#) [UMA0G471MDD](#) [UMA1A101MDD](#) [UMA1A220MDD](#)
[UMA1A220MDD1TE](#) [UMA1C330MDD](#) [UMA1C470MDD](#) [UMA1C470MDD1TE](#) [UMA1C4R7MCD2](#) [UMA0G221MDD](#)
[UMA0G221MDD1TP](#) [UMA0G330MDD](#) [UMA0J330MDD](#) [UMA0J331MDD](#) [UMA0J470MDD](#) [UMA1C101MDD](#)
[UMA1C220MDD](#) [UMA1C220MDD1TP](#) [UMA1E3R3MCD2](#) [UMA1E470MDD](#) [UMA0J220MDD](#) [UMA0J221MDD](#)
[UMA1A470MDD](#) [UMA1A470MDD1TP](#) [UMA1C100MDD](#) [UMA1C100MDD1TE](#) [UMA1C100MDD1TP](#) [UMA1E220MDD](#)
[UMA1E330MDD](#) [UMA1H220MDD](#) [UMA1H2R2MDD](#) [UMA1HR33MDD](#) [UMA1V4R7MDD](#) [UMA1E4R7MDD](#)
[UMA1H010MDD](#) [UMA1H4R7MDD](#) [UMA1HR22MDD](#) [UMA1V3R3MDD](#) [UMA1V470MDD](#) [UMA1H330MDD](#)
[UMA1H3R3MDD](#) [UMA1V220MDD](#) [UMA1V2R2MCD2](#) [UMA1V330MDD](#) [UMA1HR47MDD](#) [UMA1V100MDD](#)
[UMA1C100MCD2](#) [UMA0G330MDD1TP](#) [UMA1H100MDD1TE](#) [UMA0J221MDD1TP](#) [UMA1H330MDD1TP](#)
[UMA0G470MDD1TP](#) [UMA1E3R3MCD2TP](#) [UMA0G471MDD1TP](#) [UMA0J330MDD1TP](#) [UMA1H2R2MDD1TP](#)
[UMA0G331MDD1TP](#) [UMA1E101MDD1TP](#) [UMA1V470MDD1TP](#) [UMA1H3R3MDD1TP](#) [UMA1H010MDD1TP](#)
[UMA0G101MDD1TP](#) [UMA1E4R7MDD1TP](#) [UMA1HR47MDD1TP](#) [UMA0J470MDD1TP](#) [UMA1E330MDD1TP](#)
[UMA0G220MCD2TP](#) [UMA0J100MCD2TP](#) [UMA0J101MDD1TP](#) [UMA1A101MDD1TP](#) [UMA1E470MDD1TP](#)
[UMA1E100MDD1TP](#) [UMA1A220MDD1TP](#) [UMA1H4R7MDD1TP](#) [UMA1V100MDD1TP](#) [UMA0J331MDD1TP](#)
[UMA1V3R3MDD1TP](#) [UMA0J220MDD1TP](#) [UMA1V330MDD1TP](#) [UMA1C330MDD1TP](#) [UMA1C101MDD1TP](#)
[UMA1HR22MDD1TP](#) [UMA1V2R2MCD2TP](#) [UMA1A330MDD1TP](#) [UMA1H220MDD1TP](#) [UMA1V220MDD1TP](#)