


UMV 5mmL, Long Life Assurance

- Extended load life of 5000 hours at +105°C, with 5mm height.
- Compliant to the RoHS directive (2011/65/EU).

Values marked with an ※ in the dimension table are scheduled to be discontinued and are not recommended for new designs.




Long Life

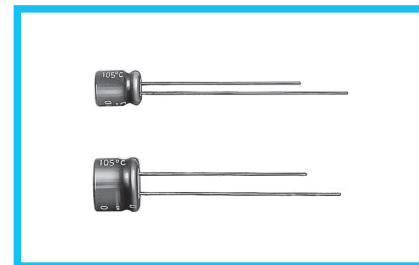UMT
UMF


Specifications

Item	Performance Characteristics							
Category Temperature Range	−40 to +105°C							
Rated Voltage Range	4 to 50V							
Rated Capacitance Range	0.1 to 100μF							
Capacitance Tolerance	± 20% at 120Hz, 20°C							
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.							
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C							
	Rated voltage (V)	4	6.3	10	16	25	35	50
	tan δ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13	0.12
Stability at Low Temperature	Measurement frequency : 120Hz							
	Rated voltage (V)	4	6.3	10	16	25	35	50
	Impedance ratio ZT / Z20 (MAX.)	Z−25°C / Z+20°C	8	4	3	2	2	2
		Z−40°C / Z+20°C	14	10	7	5	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 105°C.				Capacitance change		Within ±30% of the initial capacitance value	
					tan δ		300% or less than the initial specified value	
					Leakage current		Less than or equal to the initial specified value	
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.							
Marking	Printed with silver color letter on dark brown sleeve.							

Radial Lead Type

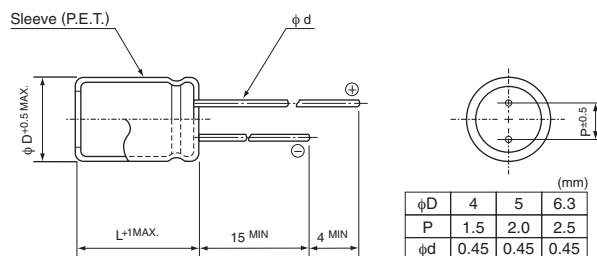

Type numbering system (Example : 25V 10μF)

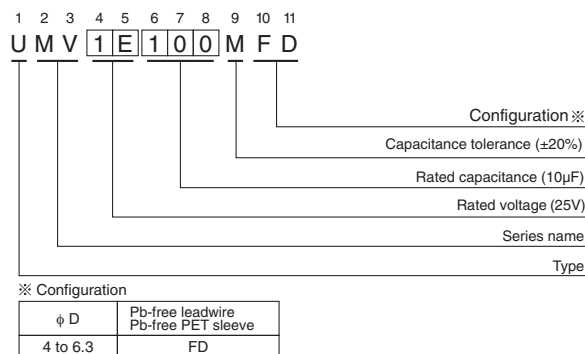

Dimensions

Cap.(μF)	V	4	6.3	10	16	25	35	50
Code		0G	0J	1A	1C	1E	1V	1H
0.1	0R1							※ 4 × 5 1.0
0.22	R22							※ 4 × 5 2.6
0.33	R33							※ 4 × 5 3.2
0.47	R47							※ 4 × 5 3.8
1	010							4 × 5 6.2
2.2	2R2							4 × 5 11
3.3	3R3							4 × 5 14
4.7	4R7					4 × 5 13	4 × 5 15	5 × 5 19
10	100				4 × 5 18	5 × 5 23	5 × 5 25	6.3 × 5 30
22	220	4 × 5 22	4 × 5 22	5 × 5 27	5 × 5 30	6.3 × 5 38	6.3 × 5 42	
33	330	5 × 5 30	5 × 5 30	5 × 5 35	6.3 × 5 40	6.3 × 5 48		
47	470	5 × 5 36	5 × 5 36	6.3 × 5 46	6.3 × 5 50			
100	101	6.3 × 5 60	6.3 × 5 60					Case size φD × L (mm) Rated ripple

Rated ripple current (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UMV0J330MFD](#) [UMV0J470MFD](#) [UMV1E100MFD](#) [UMV1E220MFD](#) [UMV0J101MFD](#) [UMV0J220MFD](#)
[UMV0G330MFD](#) [UMV0G470MFD](#) [UMV1C100MFD](#) [UMV1C100MFD1TP](#) [UMV1C220MFD](#) [UMV0G101MFD](#)
[UMV0G220MFD](#) [UMV1A220MFD](#) [UMV1A330MFD](#) [UMV1A470MFD](#) [UMV1E330MFD](#) [UMV1E4R7MFD](#)
[UMV1H010MFD](#) [UMV1H4R7MFD](#) [UMV1HR22MFD](#) [UMV1HR33MFD](#) [UMV1C330MFD](#) [UMV1C470MFD](#)
[UMV1H2R2MFD](#) [UMV1H3R3MFD](#) [UMV1H0R1MFD](#) [UMV1H100MFD](#) [UMV1V220MFD](#) [UMV1V4R7MFD](#)
[UMV1HR47MFD](#) [UMV1V100MFD](#) [UMV0J101MFD1TP](#) [UMV1V100MFD1TP](#) [UMV1C330MFD1TP](#)
[UMV1H100MFD1TP](#) [UMV1H010MFD1TP](#) [UMV1C220MFD1TP](#) [UMV1E100MFD1TP](#) [UMV0J330MFD1TP](#)
[UMV1HR47MFD1TP](#) [UMV1E330MFD1TP](#) [UMV1H3R3MFD1TP](#) [UMV1A470MFD1TP](#) [UMV1A220MFD1TP](#)
[UMV1H4R7MFD1TP](#) [UMV1E220MFD1TP](#) [UMV0G101MFD1TP](#) [UMV0G330MFD1TP](#) [UMV1V220MFD1TP](#)
[UMV1HR22MFD1TP](#) [UMV1C470MFD1TP](#) [UMV1H0R1MFD1TP](#) [UMV1HR33MFD1TP](#) [UMV1V4R7MFD1TP](#)
[UMV1E4R7MFD1TP](#) [UMV1H2R2MFD1TP](#) [UMV1A470MFD1TE](#)