

The SVPC series is designed as the larger capacitance version of the SVPA series. Adopt this series to reduce the size of equipment and circuits. This product can support lead free-reflow.*2




Specifications

| Items | Condition | | Specifications | | | | |
|--|---|--------|---|--------------|-----|----|----|
| Rated voltage (V) | - | | 2.5 | 4.0 | 6.3 | 10 | 16 |
| Surge voltage (V) | Room temperature | | 3.3 | 5.2 | 8.2 | 12 | 18 |
| Category temperature range (°C) | - | | -55 to +105 | | | | |
| Capacitance tolerance (%) | 120Hz/20°C | | M : ±20 | | | | |
| Dissipation Factor (DF) | 120Hz/20°C | | Please see the attached characteristics list | | | | |
| Leakage current*1 | Rated voltage applied, after 2 minutes | | Please see the attached characteristics list | | | | |
| Equivalent series resistance (ESR) | 100kHz/20°C | | Please see the attached characteristics list | | | | |
| Characteristics of impedance ratio at high temp. and low temp. | Based the value at 100kHz, +20°C | -55°C | Z/Z _{20°C} | 0.75 to 1.25 | | | |
| | | +105°C | Z/Z _{20°C} | 0.75 to 1.25 | | | |
| Endurance | 105°C, 2,000h, Rated voltage applied | △C/C | Within ±20% of the initial value | | | | |
| | | DF | Within 1.5 times of the initial limit | | | | |
| | | ESR | Within 1.5 times of the initial limit | | | | |
| | | LC | Within the initial limit | | | | |
| Damp heat(Steady state) | 60°C, 90 to 95%RH, 1,000h, No-applied voltage | △C/C | Within ±20% of the initial value | | | | |
| | | DF | Within 1.5 times of the initial limit | | | | |
| | | ESR | Within 1.5 times of the initial limit | | | | |
| | | LC | Within the initial limit (after voltage processing) | | | | |
| Resistance to soldering heat*2 | VPS (230°C X 75s) | △C/C | Within ±10% of the initial value (±15% for 2.5V 4.0V) | | | | |
| | | DF | Within 1.3 times of the initial limit | | | | |
| | | ESR | Within 1.3 times of the initial limit | | | | |
| | | LC | Within the initial limit (after voltage processing) | | | | |

*1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C.

*2 Please refer to page 26 for reflow soldering conditions.

Marking and dimensions

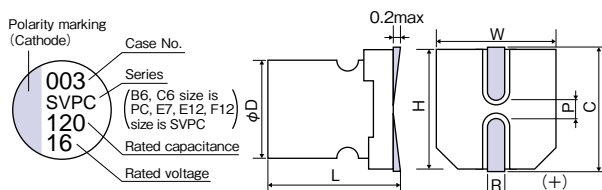

(unit : mm)

| Size code | φD ±0.5 | L ^{+0.1} _{-0.4} | W ±0.2 | H ±0.2 | C ±0.2 | R | P ±0.2 |
|-----------|---------|-----------------------------------|--------|--------|--------|------------|--------|
| B6 | 5.0 | 5.9 | 5.3 | 5.3 | 6.0 | 0.6 to 0.8 | 1.4 |
| C6 | 6.3 | 5.9 | 6.6 | 6.6 | 7.3 | 0.6 to 0.8 | 2.1 |
| E7 | 8.0 | 6.9 | 8.3 | 8.3 | 9.0 | 0.6 to 0.8 | 3.2 |
| E12 | 8.0 | 11.9 | 8.3 | 8.3 | 9.0 | 0.8 to 1.1 | 3.2 |
| F12 | 10.0 | 12.6 | 10.3 | 10.3 | 11.0 | 0.8 to 1.1 | 4.6 |

Size list

RV : Rated voltage

| μF \ RV | 2.5 | 4.0 | 6.3 | 10 | 16 |
|---------|-----|---------|-----|----|-----|
| 39 | | | | | B6 |
| 68 | | | | B6 | C6 |
| 100 | | | B6 | | C6 |
| 120 | | | B6 | C6 | E7 |
| 150 | | B6 | | | E7 |
| 180 | B6 | | | | |
| 220 | | | C6 | | |
| 270 | | | | E7 | E12 |
| 330 | | C6 | C6 | | |
| 390 | C6 | | E7 | | |
| 560 | C6 | E7, E12 | | | |
| 680 | E7 | | | | |
| 820 | E12 | | E12 | | |
| 1,200 | | E12 | | | |
| 1,500 | E12 | E12 | | | |
| 2,700 | F12 | | | | |


SVPC series characteristics list

| Size code | Part number | Rated voltage (V) | Rated capacitance (μF) | ESR (mΩ) (max) | | Rated ripple current 100kHz (mA _{rms}) at 105°C | DF (% max) | Leakage current (μA)(max) After 2 minutes |
|--------------|--------------|-------------------|------------------------|----------------|---------------|--|------------|--|
| | | | | 100kHz/20°C | 300kHz/20°C*1 | | | |
| B6 | 16SVPC39M | 16 | 39 | 35 | 30 | 1820 | 12 | 300 |
| | 16SVPC39MV | 16 | 39 | 27 | 23 | 2350 | 12 | 300 |
| | 10SVPC68M | 10 | 68 | 30 | 26 | 1970 | 12 | 300 |
| | 10SVPC68MV | 10 | 68 | 23 | 20 | 2540 | 12 | 300 |
| | 6SVPC100M | 6.3 | 100 | 30 | 26 | 1970 | 12 | 300 |
| | 6SVPC100MY | 6.3 | 100 | 25 | 21 | 2150 | 12 | 300 |
| | 6SVPC120MV | 6.3 | 120 | 21 | 18 | 2660 | 12 | 300 |
| | 4SVPC150M | 4.0 | 150 | 30 | 26 | 1970 | 12 | 300 |
| | 4SVPC150MY | 4.0 | 150 | 23 | 20 | 2240 | 12 | 300 |
| | 4SVPC150MV | 4.0 | 150 | 20 | 17 | 2730 | 12 | 300 |
| | 2R5SVPC180M | 2.5 | 180 | 30 | 26 | 1970 | 12 | 300 |
| | 2R5SVPC180MY | 2.5 | 180 | 24 | 20 | 2200 | 12 | 300 |
| | 2R5SVPC180MV | 2.5 | 180 | 19 | 16 | 2800 | 12 | 300 |
| | C6 | 16SVPC68M | 16 | 68 | 30 | 26 | 2200 | 12 |
| 16SVPC68MV | | 16 | 68 | 25 | 22 | 2440 | 12 | 300 |
| 16SVPC100M | | 16 | 100 | 24 | 23 | 2490 | 12 | 300 |
| 10SVPC120M | | 10 | 120 | 27 | 23 | 2320 | 12 | 300 |
| 10SVPC120MV | | 10 | 120 | 22 | 19 | 2600 | 12 | 300 |
| 6SVPC220M | | 6.3 | 220 | 27 | 23 | 2320 | 12 | 300 |
| 6SVPC220MV | | 6.3 | 220 | 15 | 13 | 3160 | 12 | 300 |
| 6SVPC330M | | 6.3 | 330 | 17 | 15 | 3390 | 12 | 415 |
| 4SVPC330M | | 4.0 | 330 | 27 | 23 | 2320 | 12 | 300 |
| 4SVPC330MY | | 4.0 | 330 | 21 | 18 | 2630 | 12 | 300 |
| 4SVPC330MV | | 4.0 | 330 | 15 | 13 | 3160 | 12 | 300 |
| 2R5SVPC390M | | 2.5 | 390 | 25 | 22 | 2410 | 12 | 300 |
| 2R5SVPC390MV | | 2.5 | 390 | 15 | 13 | 3160 | 12 | 300 |
| 2R5SVPC560M | | 2.5 | 560 | 16 | 14 | 3500 | 12 | 300 |
| E7 | 16SVPC120M | 16 | 120 | 27 | 23 | 2900 | 12 | 500 |
| | 16SVPC150M | 16 | 150 | 22 | 21 | 3220 | 12 | 500 |
| | 10SVPC270M | 10 | 270 | 22 | 19 | 3220 | 12 | 500 |
| | 6SVPC390M | 6.3 | 390 | 22 | 19 | 3220 | 12 | 491 |
| | 4SVPC560M | 4.0 | 560 | 22 | 19 | 3220 | 12 | 500 |
| | 2R5SVPC680M | 2.5 | 680 | 20 | 17 | 3370 | 12 | 500 |
| E12 | 16SVPC270M | 16 | 270 | 16 | 14 | 4070 | 15 | 864 |
| | 6SVPC820M | 6.3 | 820 | 12 | 10 | 4700 | 15 | 1033 |
| | 4SVPC560MX | 4.0 | 560 | 9 | 8 | 5380 | 15 | 500 |
| | 4SVPC1200M | 4.0 | 1200 | 12 | 10 | 4700 | 15 | 960 |
| | 4SVPC1500M | 4.0 | 1500 | 12 | 10 | 4700 | 15 | 1200 |
| | 2R5SVPC820M | 2.5 | 820 | 9 | 8 | 5380 | 15 | 500 |
| 2R5SVPC1500M | 2.5 | 1500 | 10 | 9 | 5150 | 15 | 750 | |
| F12 | 2R5SVPC2700M | 2.5 | 2700 | 12 | 10 | 5070 | 15 | 1350 |

*1 The ESR value in 300kHz is a reference one.

Recommended land pattern dimension of PWB

(unit : mm)

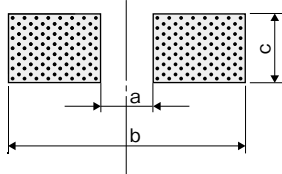

| Size code | a | b | c |
|-----------|-----|------|-----|
| B6 | 1.4 | 7.4 | 1.6 |
| C6 | 2.1 | 9.1 | 1.6 |
| E7 | 2.8 | 11.1 | 1.9 |
| E12 | 2.8 | 11.1 | 1.9 |
| F12 | 4.3 | 13.1 | 1.9 |

Frequency coefficient for ripple current

| Frequency | 120Hz ≤ f < 1kHz | 1kHz ≤ f < 10kHz | 10kHz ≤ f < 100kHz | 100kHz ≤ f ≤ 500kHz |
|-------------|------------------|------------------|--------------------|---------------------|
| Coefficient | 0.05 | 0.3 | 0.7 | 1 |

Series system
diagram
Image of
case size
Products list
Packing
specifications
(SMD type)
Packing
specifications
(Radial lead type)

Recommended
soldering
condition
Fundamental
structure
Characteristics
Reliability

SVPF
SVPE
SVPS
SVPD
SVPC
SVPB
SVPA
SVQP
SVP

SEPF
SEPC
SEQP
SEP

Catalog Deletion and
EOL series

POSCAP
POSCAP
Line-up

Guidelines and
precautions for use

Series system
diagram
Image of
case size
Products list
Explanation of
part numbers
Packing
specifications

Marking
Recommended
land pattern
dimension
Recommended
soldering
condition
Fundamental
structure
Characteristics
Reliability

TPU
TPH
TPG
TPSF
TPE
TPB/TPC
TPL·TPLF
TPF
TA
TV
TH
TQC

Catalog Deletion and
EOL models

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[6SVPC100MY](#) [10SVPC68MV](#) [2R5SVPC180M](#) [4SVPC1500M](#) [10SVPC120MV](#) [2R5SVPC390M](#) [16SVPC68M](#)
[4SVPC560M](#) [4SVPC330MY](#) [10SVPC120M](#) [4SVPC330MV](#) [2R5SVPC1500M](#) [2R5SVPC180MY](#) [16SVPC39MV](#)
[4SVPC1200M](#) [16SVPC150M](#) [6SVPC390M](#) [4SVPC150MV](#) [4SVPC560MX](#) [2R5SVPC390MV](#) [10SVPC68M](#)
[16SVPC120M](#) [6SVPC330M](#) [6SVPC120MV](#) [2R5SVPC820M](#) [2R5SVPC180MV](#) [10SVPC270M](#) [16SVPC270M](#)
[2R5SVPC680M](#) [6SVPC820M](#) [6SVPC220MV](#) [16SVPC100M](#) [2R5SVPC560M](#) [6SVPC100M](#) [2R5SVPC2700M](#)
[6SVPC220M](#) [4SVPC150MY](#) [16SVPC39M](#) [4SVPC330M](#) [4SVPC150M](#) [16SVPC68MV](#)