



UMT

5mmL, Wide Temperature Range

Anti-Solvent
Feature

- Wide temperature range of -55 to $+105^{\circ}\text{C}$, with 5mm height.
- Compliant to the RoHS directive (2011/65/EU).


Values marked with an * in the dimension table are scheduled to be discontinued and are not recommended for new designs.

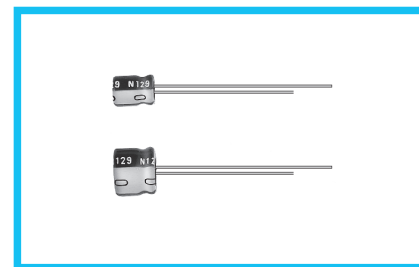

Specifications


Item	Performance Characteristics								
Category Temperature Range	-55 to +105°C								
Voltage Range	4 to 50V								
Rated Capacitance Range	0.1 to 100μF								
Rated Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.								
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C								
	Rated voltage (V)	4	6.3	10	16	25	35	50	Figures in () are for φ 3 product.
tan δ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13 (0.14)	0.12 (0.14)		
Stability at Low Temperature	Measurement frequency : 120Hz								
	Rated voltage (V)		4	6.3	10	16	25	35	50
	Impedance ratio	Z-25°C / Z+20°C	6	3	3	2	2	2	2
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	5	4	3	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.					Capacitance change			Within ±25% of the initial capacitance value (φ 3mm unit, and ≤ 16V) Within ±20% of the initial capacitance value (≥ 25V)
						tan δ		200% or less than the initial specified value	
						Leakage current		Less than or equal to the initial specified value	
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
Marking	Printed with white color letter on black sleeve.								

Radial Lead Type

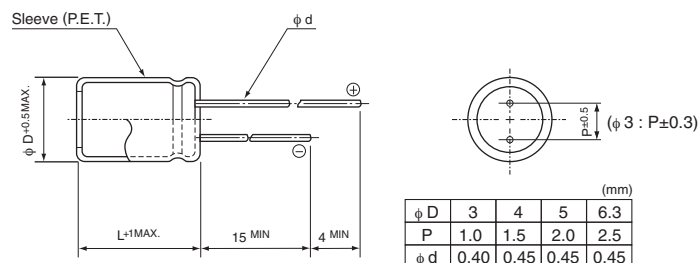

- Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 25V $10\mu\text{F}$)

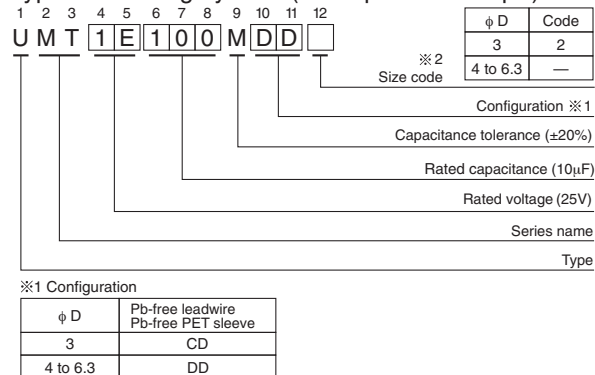

※2 For $\phi 3\text{mm}$ unit, place size code of [2] to 12th digit.

Dimensions

V		4		6.3		10		16		25		35		50	
Cap.(μF)	Code	0G		0J		1A		1C		1E		1V		1H	
0.1	0R1													※ ● 4 × 5	1.0(1.0)
0.22	R22													※ ● 4 × 5	2.6(2.6)
0.33	R33													※ ● 4 × 5	3.2(3.2)
0.47	R47													※ ● 4 × 5	3.8(3.8)
1	010													● 4 × 5	6.2(5.9)
2.2	2R2											3 × 5	7.5	● 4 × 5	11 (9)
3.3	3R3											● 4 × 5	11 (9)	4 × 5	14
4.7	4R7									● 4 × 5	13 (10)	4 × 5	15	5 × 5	19
10	100							● 4 × 5	18 (14)	5 × 5	23	5 × 5	25	6.3 × 5	30
22	220	4 × 5	22	4 × 5	22	5 × 5	27	5 × 5	30	6.3 × 5	38	6.3 × 5	48		
33	330	5 × 5	30	5 × 5	30	5 × 5	35	6.3 × 5	40	6.3 × 5	48				
47	470	5 × 5	36	5 × 5	36	6.3 × 5	46	6.3 × 5	50						
100	101	6.3 × 5	60	6.3 × 5	60									Case size φ D × L (mm)	Rated ripple

Size $\phi 3 \times 5$ is available for capacitors marked "●".
Figures in () are for $\phi 3$ product.

Rated ripple current (mA rms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UMT0G101MDD](#) [UMT0J470MDD](#) [UMT1A220MDD](#) [UMT1A330MDD](#) [UMT1E220MDD](#) [UMT1E330MDD](#)
[UMT0J220MDD](#) [UMT0J330MDD](#) [UMT0G470MDD](#) [UMT0J101MDD](#) [UMT1C100MDD](#) [UMT1C220MDD](#)
[UMT1C330MDD](#) [UMT0G220MDD](#) [UMT0G330MDD](#) [UMT1A470MDD](#) [UMT1A470MDD1TE](#) [UMT1C100MCD2](#)
[UMT1E4R7MCD2](#) [UMT1E4R7MDD](#) [UMT1H010MCD2](#) [UMT1H3R3MDD](#) [UMT1H4R7MDD](#) [UMT1V2R2MCD2](#)
[UMT1V3R3MCD2](#) [UMT1V3R3MDD](#) [UMT1C470MDD](#) [UMT1E100MDD](#) [UMT1H100MDD](#) [UMT1H2R2MCD2](#)
[UMT1H2R2MDD](#) [UMT1V100MDD](#) [UMT1V220MDD](#) [UMT1H010MDD](#) [UMT1H0R1MCD2](#) [UMT1H0R1MDD](#)
[UMT1HR33MDD](#) [UMT1HR47MCD2](#) [UMT1HR47MDD](#) [UMT1HR22MCD2](#) [UMT1HR22MDD](#) [UMT1HR33MCD2](#)
[UMT1V4R7MDD](#) [UMT0J101MDD1TP](#) [UMT1HR22MCD2TP](#) [UMT0G101MDD1TP](#) [UMT1H2R2MCD2TP](#)
[UMT1HR33MCD2TP](#) [UMT1V3R3MCD2TP](#) [UMT1H0R1MCD2TP](#) [UMT0G330MDD1TP](#) [UMT1A220MDD1TP](#)
[UMT1H010MCD2TP](#) [UMT0J330MDD1TP](#) [UMT1C220MDD1TP](#) [UMT1V100MDD1TP](#) [UMT1H100MDD1TP](#)
[UMT1E220MDD1TP](#) [UMT1H4R7MDD1TP](#) [UMT1E330MDD1TP](#) [UMT0J220MDD1TP](#) [UMT1C100MDD1TP](#)
[UMT1E4R7MCD2TP](#) [UMT1E100MDD1TP](#) [UMT1V220MDD1TP](#) [UMT1H010MDD1TP](#) [UMT1C330MDD1TP](#)
[UMT1V4R7MDD1TP](#) [UMT1HR47MCD2TP](#) [UMT1C100MCD2TP](#) [UMT0G470MDD1TP](#) [UMT1A330MDD1TP](#)
[UMT1A470MDD1TP](#) [UMT1E4R7MDD1TP](#) [UMT1C470MDD1TP](#) [UMT1V2R2MCD2TP](#) [UMT1V3R3MDD1TP](#)